

Termax TES 58

Description

Standard thermal paper for POS applications, with standard sensitivity and good printability for high speed thermal printers.

Bisphenol A (BPA) free.

Image durability: 10 years at correct handling and storage conditions for thermal paper.

End uses

POS receipts, Bank statements, ATM receipts, Coupons, Kiosks, Faxes, Medical charts

Print methods

Flexo, Offset

Certificates

- [REACH regulation Lecta](#)
- [Lecta Information BPS REACH](#)
- [PEFC Chain of Custody \(multisite\)](#)
- [FSC Chain of Custody \(multisite\)](#)
- [ISO 14001 Environment](#)
- [EMAS Leitza mill](#)
- [ISO 50001 Energy Efficiency](#)
- [ISO 9001 Quality](#)
- [ISO 45001 Health and Safety - Lecta](#)
- [Paper Profile Termax](#)

For further details regarding compliance with food contact regulation, please contact our sales teams.

Termax TES 58



Physical Properties

Property	Test Method	Unit	Value	Tolerance
Substance	ISO 536	g/m ² lbs (17x22-500 sheets)	58 15.4	± 4%
Thickness	ISO 534	µm mils	66 2.6	± 5 ± 0.2
Bekk smoothness	ISO 5627	s	300	≥ 250
Brightness	ISO 2470	%	90	≥ 86
Tensile strength CD	ISO 1924-2	kN/m	1.6	-0.5
Tensile strength MD	ISO 1924-2	kN/m	2.8	-1.0

Stability Properties

Property	Conditions	Image Stability	Paper Stability
Heat resistance	60°C, 30% HR, 24h	≥ 65%	≤ 0.15 D.O.
Humidity resistance	40°C, 90% HR, 24h	≥ 90%	≤ 0.15 D.O.
Light resistance	5.000 Lux, 100h	≥ 95%	≤ 0.12 D.O.

Image Sensitivity

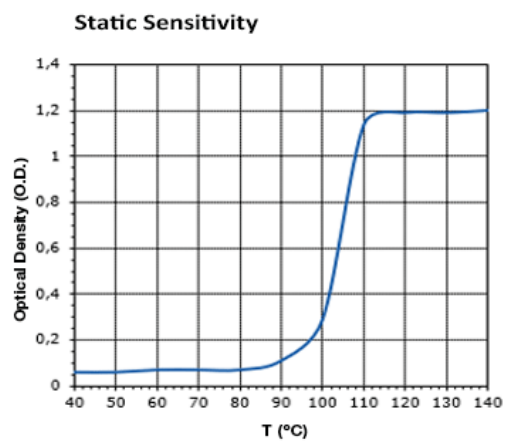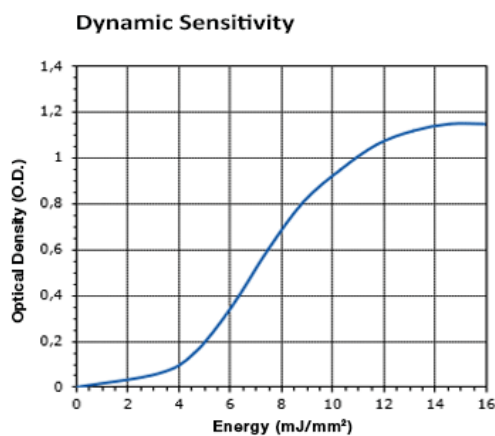

Values are subject to change without notice.
Last update: 04/15/2026