

## Termax TC30X 135

### Description

Top-coated thermal paper of high grammage, with excellent resistance to scratching, grease, solvents, water and plasticizers.

Phenol free.

Image durability: 15 years at correct handling and storage conditions for thermal paper.

### End uses

Transport tickets, Boarding passes, Entertainment tickets, Tags, Retail labels, bags and packaging, Shipping and logistics labels

### Print methods

Flexo, Offset

### Certificates

- [PEFC Chain of Custody \(multisite\)](#)
- [FSC Chain of Custody \(multisite\)](#)
- [REACH regulation Lecta](#)
- [ISO 14001 Environment](#)
- [EMAS Leitza mill](#)
- [ISO 50001 Energy Efficiency](#)
- [ISO 9001 Quality](#)
- [ISO 45001 Health and Safety - Lecta](#)
- [Paper Profile Termax](#)

For further details regarding compliance with food contact regulation, please contact our sales teams.

# Termax TC30X 135



## Physical Properties

Property	Test Method	Unit	Value	Tolerance
Substance	ISO 536	g/m <sup>2</sup> lbs (17x22-500 sheets)	135 35.9	± 4%
Thickness	ISO 534	µm mils	149 5.87	± 5
Bekk smoothness	ISO 5627	s	800	≥ 500
Brightness	ISO 2470	%	95	≥ 90
Tensile strength CD	ISO 1924-2	kN/m	3.5	- 0.5
Tensile strength MD	ISO 1924-2	kN/m	6.5	- 1.0

## Stability Properties

Property	Conditions	Image Stability	Paper Stability
Heat resistance	60°C, 30% HR, 24h	≥ 90%	≤ 0.12 D.O.
Humidity resistance	40°C, 90% HR, 24h	≥ 90%	≤ 0.12 D.O.
Light resistance	5.000 Lux, 100h	≥ 90%	≤ 0.10 D.O.

## Image Sensitivity

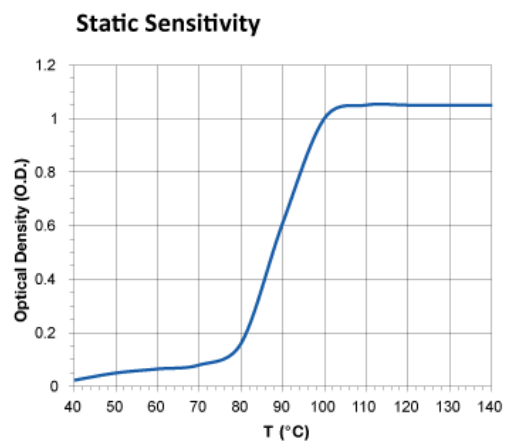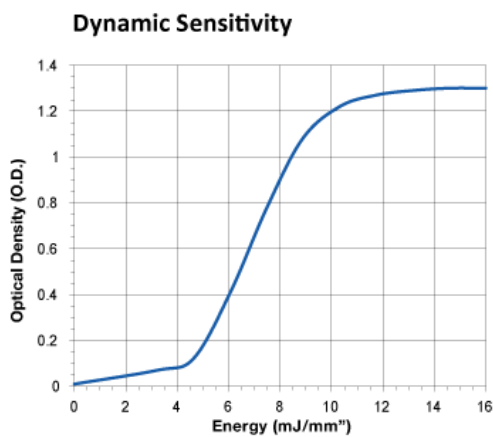

Values are subject to change without notice.  
Last update: 04/15/2026